


# Ultrasonic Flowmeter

Flowmax® 30S

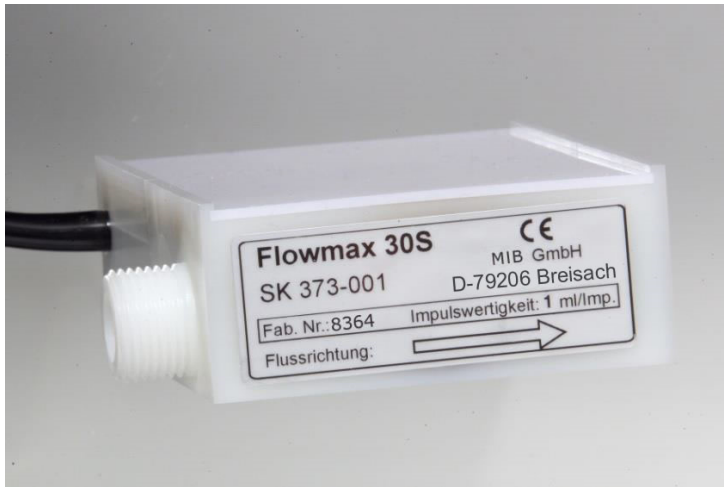

The ultrasonic flowmeter in beverage dispensing systems for alcoholic and nonalcoholic drinks. The contact-free flow measurement with no moving parts is wear and maintenance free. The free pipe cross-section over the whole channel geometry meets maximum hygienic requirements. Mechanical and / or chemical cleaning is possible without affecting the meters. Opening the beverage line and the meter can be dropped.

The integrated foam monitor with empty pipe messages through alarm output provides additional information. High protection against manipulation and guaranteed long-term stable measurement results. Simple electrical connection with circular connector in IP65 for connection to Flowview 2S-II.

Flowmax® 30S is an ideal sensor for computer beverage dispensing systems.

SI 006E/FM30S/04.17

## Housing

Material	PE-HD (Polyethylene)		
Protection class	IP65		
Medium temperature	0° ...50°C		
Measuring range [ml/s]	100	200	1000
Nominal diameter [DN]	7	10	15
Pressure max.	7 bar	7 bar	7 bar
Process connection outside thread	G 5/8"	G 5/8"	G 3/4"
Dimensions L/W/H in mm	142/130/40	142/130/40	142/130/58
Weight in kg	0,7	0,7	0,8

## Electronics

Power supply	20...30VDC / ca. 2,5W
Electrical connection	5-wire cable with plug IP 65, length 5m
Outputs	Digital pulse- and alarm output
Communication	Serial data bus
Max error of measurement	±2% Reference conditions (VDI/VDE 2642)
Repeatability	≤ 0,5%

Flowmax® 30S: installing and be safe. A very good solution for your beverage dispensing control!

## Further information:

### MIB GmbH

Bahnhofstr. 35, D-79206 Breisach  
Tel. 0049 / (0 ) 7667 – 20 777 90  
Fax: 0049 / (0 ) 7667 – 20 777 99  
Mail: info@mib-gmbh.com  
Web: www.flowmax.de

Technical subjects to be changed!

**MIB GmbH**  
Messtechnik & Industrieberatung